


# Eclipse 6W

El. nr. 3254629/3254630

Flux out: 193.5 lm

| Height | Eavg, Emax    | Angle: 45.04deg | Diameter |
|--------|---------------|-----------------|----------|
| 0.5m   | 1368,2224lx   |                 | 41.46cm  |
| 1m     | 341.9,556.0lx |                 | 82.92cm  |
| 1.5m   | 151.9,247.1lx |                 | 124.38cm |
| 2m     | 85.47,139.0lx |                 | 165.84cm |
| 2.5m   | 54.70,88.96lx |                 | 207.30cm |
| 3m     | 37.99,61.78lx |                 | 248.76cm |
| 3.5m   | 27.91,45.39lx |                 | 290.22cm |
| 4m     | 21.37,34.75lx |                 | 331.68cm |
| 4.5m   | 16.88,27.46lx |                 | 373.14cm |
| 5m     | 13.68,22.24lx |                 | 414.60cm |

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

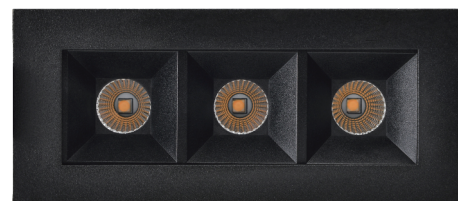

**Betek** Eclipse

 This luminaire contains built-in LED Lamps.

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**


**A**

The lamps cannot be changed in the luminaire.

874/2012 



Spennings: AC220-240V 50/60Hz  
Total effekt: 6W  
Ra:  $\geq 90$   
Fargetemperatur: 3000K  
Materiale: Alu.  
LED Chip: SDCM<3  
Garanti: 5 år  
Dimbar: JA  
IP Level: IP44  
Tilkobling: Betek tilkoblingsboks  
Driver: Bestilles separat  
Tilbehør: El. Nr.3254631, Eclipse 6W Dim-Driver  
El. Nr.3254618 DALI-Driver

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



## AVSTAND:

Minimums avstand til  
brennbart materiale i  
armaturens stråleretning

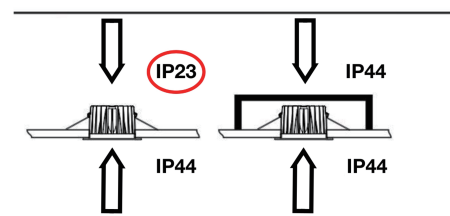

| Elnummer   | Watt<br>[W] | Lumen<br>[lm] | LED Type | Hull diameter<br>[mm] | Mål<br>[LxWxH mm] |
|------------|-------------|---------------|----------|-----------------------|-------------------|
| 3254629/30 | 6           | 280           | SMD3030  | 93x35                 | 102*44*50         |