

SPECIFICATION

Description	220-240V TRIAC Dimming LED Driver, Constant Voltage Driver
Electrical Characteristics	Ta = 25°C, 220-240Vrms input, standard reference load; unless otherwise specified
Class I, IP67, thermally protected 110, independent driver	

Product Name		3254623
---------------------	--	---------

Input Parameters		
Rated Input Voltage	Uin	220-240VAC
Input Current (Full load)	Iin	1.3A
Input Frequency	fin	50/60Hz
Maximum Input Power	Pin	230W
Power Factor (Full load)	λ	≥0.95
THD(Full load)		≤15%
Efficiency (Full load)	η	≥92%
No-load power		≤1.0W
Inrush current(Max)		65A&300us(Cold start)
Turn on time		≤500ms

Output Parameters		
Output Voltage	Vout	24V±5%
Output Current	Iout	2.7-8.3A
Output Power (Full load)	Pout	200W
Operating Frequency(Full load)	Fout	90-120KHz
PWM Frequency		300Hz
Dimming Range		1-100%
Ripple & Noise (Max)		300mVp-p
Load Regulation		±2%
Line Regulation		±2%

Ambient		
Storage Temperature	ts	-20 ... + 70°C
Operating Ambient Temperature	ta	-20 ... + 50°C
Case Temperature at tc Point	tc	80°C
Relative humidity		5 ...85%

Protection		
No Load		Auto-recovery if fault is removed
Over Load		Auto-recovery if fault is removed
Short Circuit		Auto-recovery if fault is removed


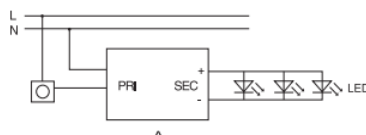
System Parameters		
Withstand voltage		3.75KVAC, Ileakage<5.0mA, 60S
Expected Life		50,000Hours

Compliances and approvals		
Safety		EN 61347-2-13
RFI		EN 55015
Harmonics		EN 61000-3-2 Class C
Immunity		EN 61547

Note

- All parameters NOT specially mentioned are measured at 240VAC input, rated load and 25 of ambient temperature.
- Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
- Expected Life:tc=80 °C, 0.2%/1000h failure rate

Physical Parameter

Dimensions(LxWxH): 249x72x40mm
Housing Material:aluminium
Input Wire:H05RN-F3x1.0mm² 300mm;Output Wire:H05RN-F2x1.0mm² 300mm