
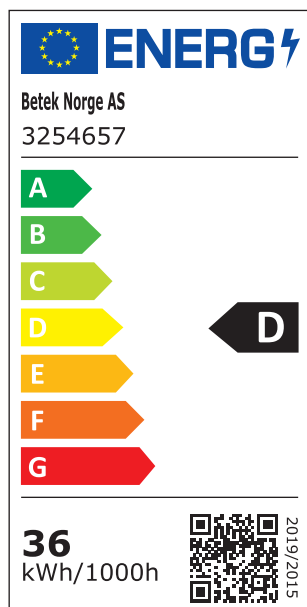


## Agder 12-36 Sensor

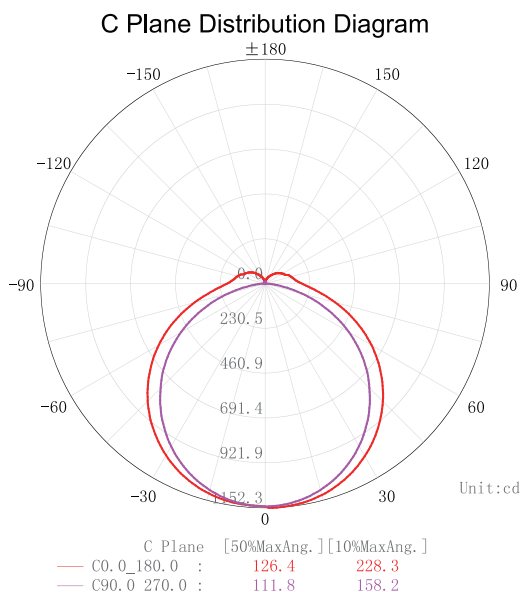



Spennings: AC 220-240V~50/60Hz  
 Effekt: 36W  
 Ra:  $\geq 80$   
 Fargetemperatur: 3000K-4000K-5000K  
 Levetid: 50000t(L70)  
 Materiale: PC+PC  
 SDCM:  $<3$   
 Garanti: 5 år  
 Dimbar: Nei  
 Isolasjonsklasse: Klasse I  
 IP: 65  
 Forpakning: 1stk/6stk

Tilkobling: Hurtigtilkobling i begge ender.  
 (Gjennomkoblet med 3x2.5mm<sup>2</sup>)

Antall armaturer pr.sikring  
 Agder 12-36 Sensor  
 B10-8stk/B13-11stk/B16-14stk.  
 C10-18stk/C13-24stk/B16-29stk.

### AVSTAND:

Minimums avstand til  
brennbart materiale i  
armaturens stråleretning



| Elnummer | Watt<br>[W] | Luminous Efficiency<br>[lm/W] | LED Type | Mål<br>[BxHxD mm] |
|----------|-------------|-------------------------------|----------|-------------------|
| 3254657  | 36W         | 130                           | SMD2835  | 1203*83*71        |