
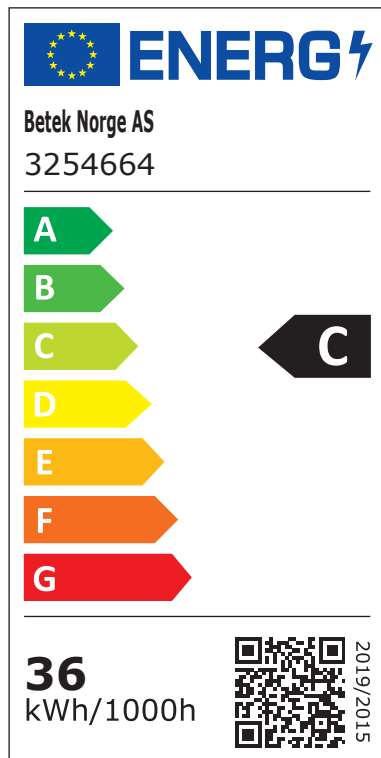


HAV 12-40

El. nr. 3254664

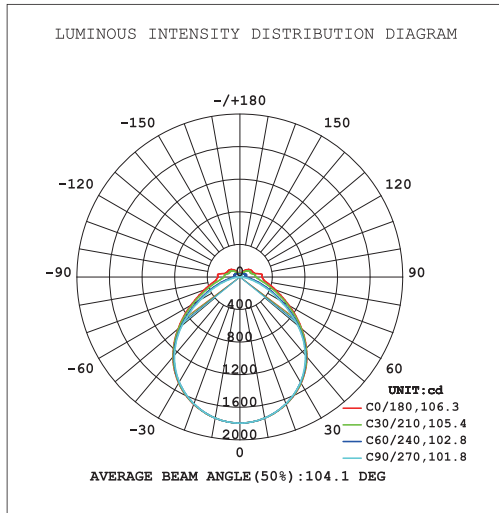

Spennings: AC 220-240V 50/60Hz

Total effekt: 40W

Lumen output: 71.4lm/w

Ra: RA>80

Fargetemperatur: 3000K/4000K

Levetid: Levetid: L80B10>100.000t ved 25 °C

SDCM <3

Materiale: Zinc coated+PMMA

Garanti: 5 år


Dimbar: Nei

IP Level: IP44

Flux out: 3197 lm

Height	Eavg, Emax	Angle: 101.43deg	Diameter
1m	667.4, 18041x		244.50cm
2m	166.8, 450.91x		489.00cm
3m	74.15, 200.41x		733.49cm
4m	41.71, 112.71x		977.99cm
5m	26.70, 72.151x		1222.49cm
6m	18.54, 50.101x		1466.99cm
7m	13.62, 36.811x		1711.49cm
8m	10.43, 28.181x		1955.99cm
9m	8.239, 22.271x		2200.48cm
10m	6.674, 18.041x		2444.98cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



Elnummer	Watt [W]	Lumen [lm]	LED Type	Mål [LxWxH mm]
3254664	40	5600	SMD	1200x155x52