

LED DRIVER

SPECIFICATION

Description	220-240V, Constant Current Driver
Electrical Characteristics	Ta = 25°C, 220-240Vrms input, standard reference load; unless otherwise specified
Class II, IP20, thermally protected 110, independent driver	

Product Name		3253672
---------------------	--	---------

Input Parameters		
Rated Input Voltage	U _{in}	220-240VAC
Input Current (Full load)	I _{in}	0.25A
Input Frequency	f _{in}	50/60Hz
Maximum Input Power	P _{in}	53W
Power Factor (Full load)	λ	≥0.95
THD(Full load)		≤15%
Efficiency (Full load)	η	≥89%
No-load power		≤0.5W
Inrush current		≤50A
Turn on time		≤500ms

Output Parameters		
Output Voltage	V _{out}	21-43V
Output Current (Full load)	I _{out}	1050mA±5%
Output Power (Full load)	P _{out}	45W
Operating Frequency(Full load)	F _{out}	60KHz
Ripple & Noise		≤100mA
Load Regulation		≤5%
Line Regulation		≤5%

Ambient		
Storage Temperature	t _s	-20 ... + 70°C
Operating Ambient Temperature	t _a	-20 ... + 50°C
Case Temperature at t _c Point	t _c	85°C
Relative humidity		5 ... 85%

Protection		
No Load		Auto-recovery if fault is removed
Over Load		Auto-recovery if fault is removed
Short Circuit		Auto-recovery if fault is removed


System Parameters		
Withstand voltage		3.75KVAC, I _{leakage} <5.0mA, 60s
Expected Life		50,000Hours

Compliances and approvals		
Safety		EN 61347-2-13
RFI		EN 55015
Harmonics		EN 61000-3-2 Class C
Immunity		EN 61547

Note

1. All parameters NOT specially mentioned are measured at 240VAC input, rated load and 25 of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Expected Life:t_c=80°C,0.2%/1000h failure rate

Physical Parameter

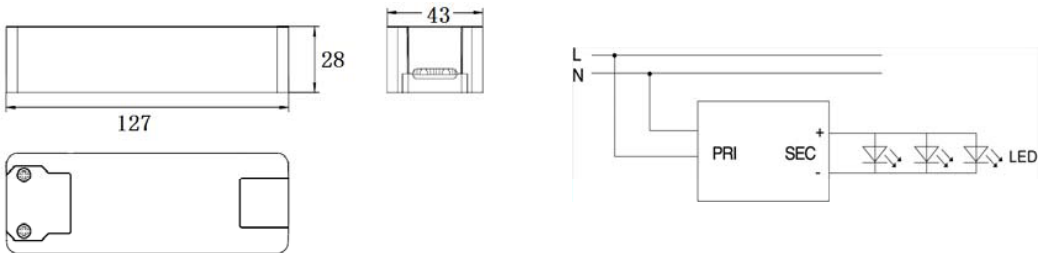

Dimensions(LxWxH):127x43x28
Housing Material:PC Plastic
Captured Terminal Screw for 0.75~2.5mm²