

## Ask Sirkel

Elnummer: 3253715

EAN: 7070913004788



IP54



### General data

Installation type	Surface
Light source	LED
Color	White

### Electrical properties

Power	6 W
Operating voltage	AC 220-240V 50/60Hz
Driver	Non-dimmable
Driver included	Yes
Insulation class	Class I
Dimmable	No

### Protection and safety

Ingress protection (IP) rating	IP54
IK classification	-
Ambient temperature	-20 to 40°C
Isosafe	-

### Installation and mechanical properties

Through-wiring	-
Cutout	-
Construction height	110mm
Gyroscopic	-
DxH (Diameter x Height)	110*110 mm
Material	Alu.

### Light performance and quality

Lumen	660 lumen
Lumens per watt	110 Lm/W
Color temperature	3000 K
Color rendering index (CRI)	80
SDCM / MacAdam step	<6
Light distribution	36°
Optics	Reflector
UGR (Unified Glare Rating)	35


### Lifetime at 25°C

Lifetime 50,000 hours	L70 B50
Lifetime 100,000 hours	L50/B10

### Energy and environment

Energy class	E
--------------	---

Luminous Intensity Distribution Curve

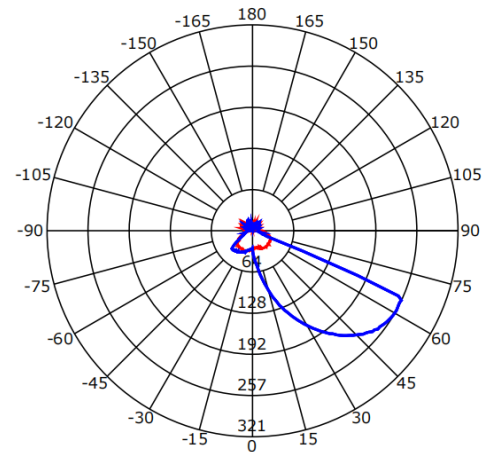

Beam Angle(50%) C0-180,C90-270: 214.7 deg,46.4 deg

C0-180 — C90-270 —