



Ask Vegglys Sort 24W

Elnummer: 3253728

EAN: 7070913004986



IP20



General data

|                   |         |
|-------------------|---------|
| Installation type | Surface |
| Light source      | LED     |
| Color             | Black   |

Electrical properties

|                   |                     |
|-------------------|---------------------|
| Power             | 24 W                |
| Operating voltage | AC 220-240V 50/60Hz |
| Driver            | No-dimmable         |
| Driver included   | Yes                 |
| Insulation class  | Class I             |
| Dimmable          | No                  |

Protection and safety

|                                |             |
|--------------------------------|-------------|
| Ingress protection (IP) rating | IP20        |
| IK classification              | -           |
| Ambient temperature            | -20 to 40°C |
| Isosafe                        | -           |

Installation and mechanical properties

|                         |               |
|-------------------------|---------------|
| Through-wiring          | -             |
| Cutout                  | -             |
| Construction height     | 45mm          |
| Gyroscopic              | -             |
| DxH (Diameter x Height) | 280*155*45 mm |
| Material                | Alu.          |

Light performance and quality

|                             |            |
|-----------------------------|------------|
| Lumen                       | 2640 lumen |
| Lumens per watt             | 110 Lm/W   |
| Color temperature           | 3000 K     |
| Color rendering index (CRI) | 80         |
| SDCM / MacAdam step         | <6         |
| Light distribution          | 214°       |
| Optics                      | Reflector  |
| UGR (Unified Glare Rating)  | 35         |


Lifetime at 25°C

|                        |         |
|------------------------|---------|
| Lifetime 50,000 hours  | L70 B50 |
| Lifetime 100,000 hours | L50/B10 |

Energy and environment

|              |   |
|--------------|---|
| Energy class | F |
|--------------|---|

Luminous Intensity Distribution Curve

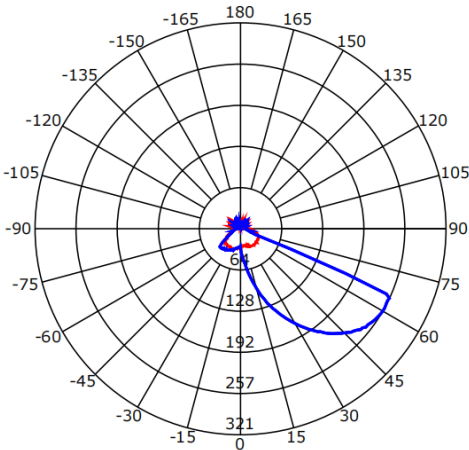

Beam Angle(50%) C0-180,C90-270: 214.7 deg,46.4 deg

C0-180 — C90-270 —